
Developing innovative technology to improve automotive components

BAOLONG

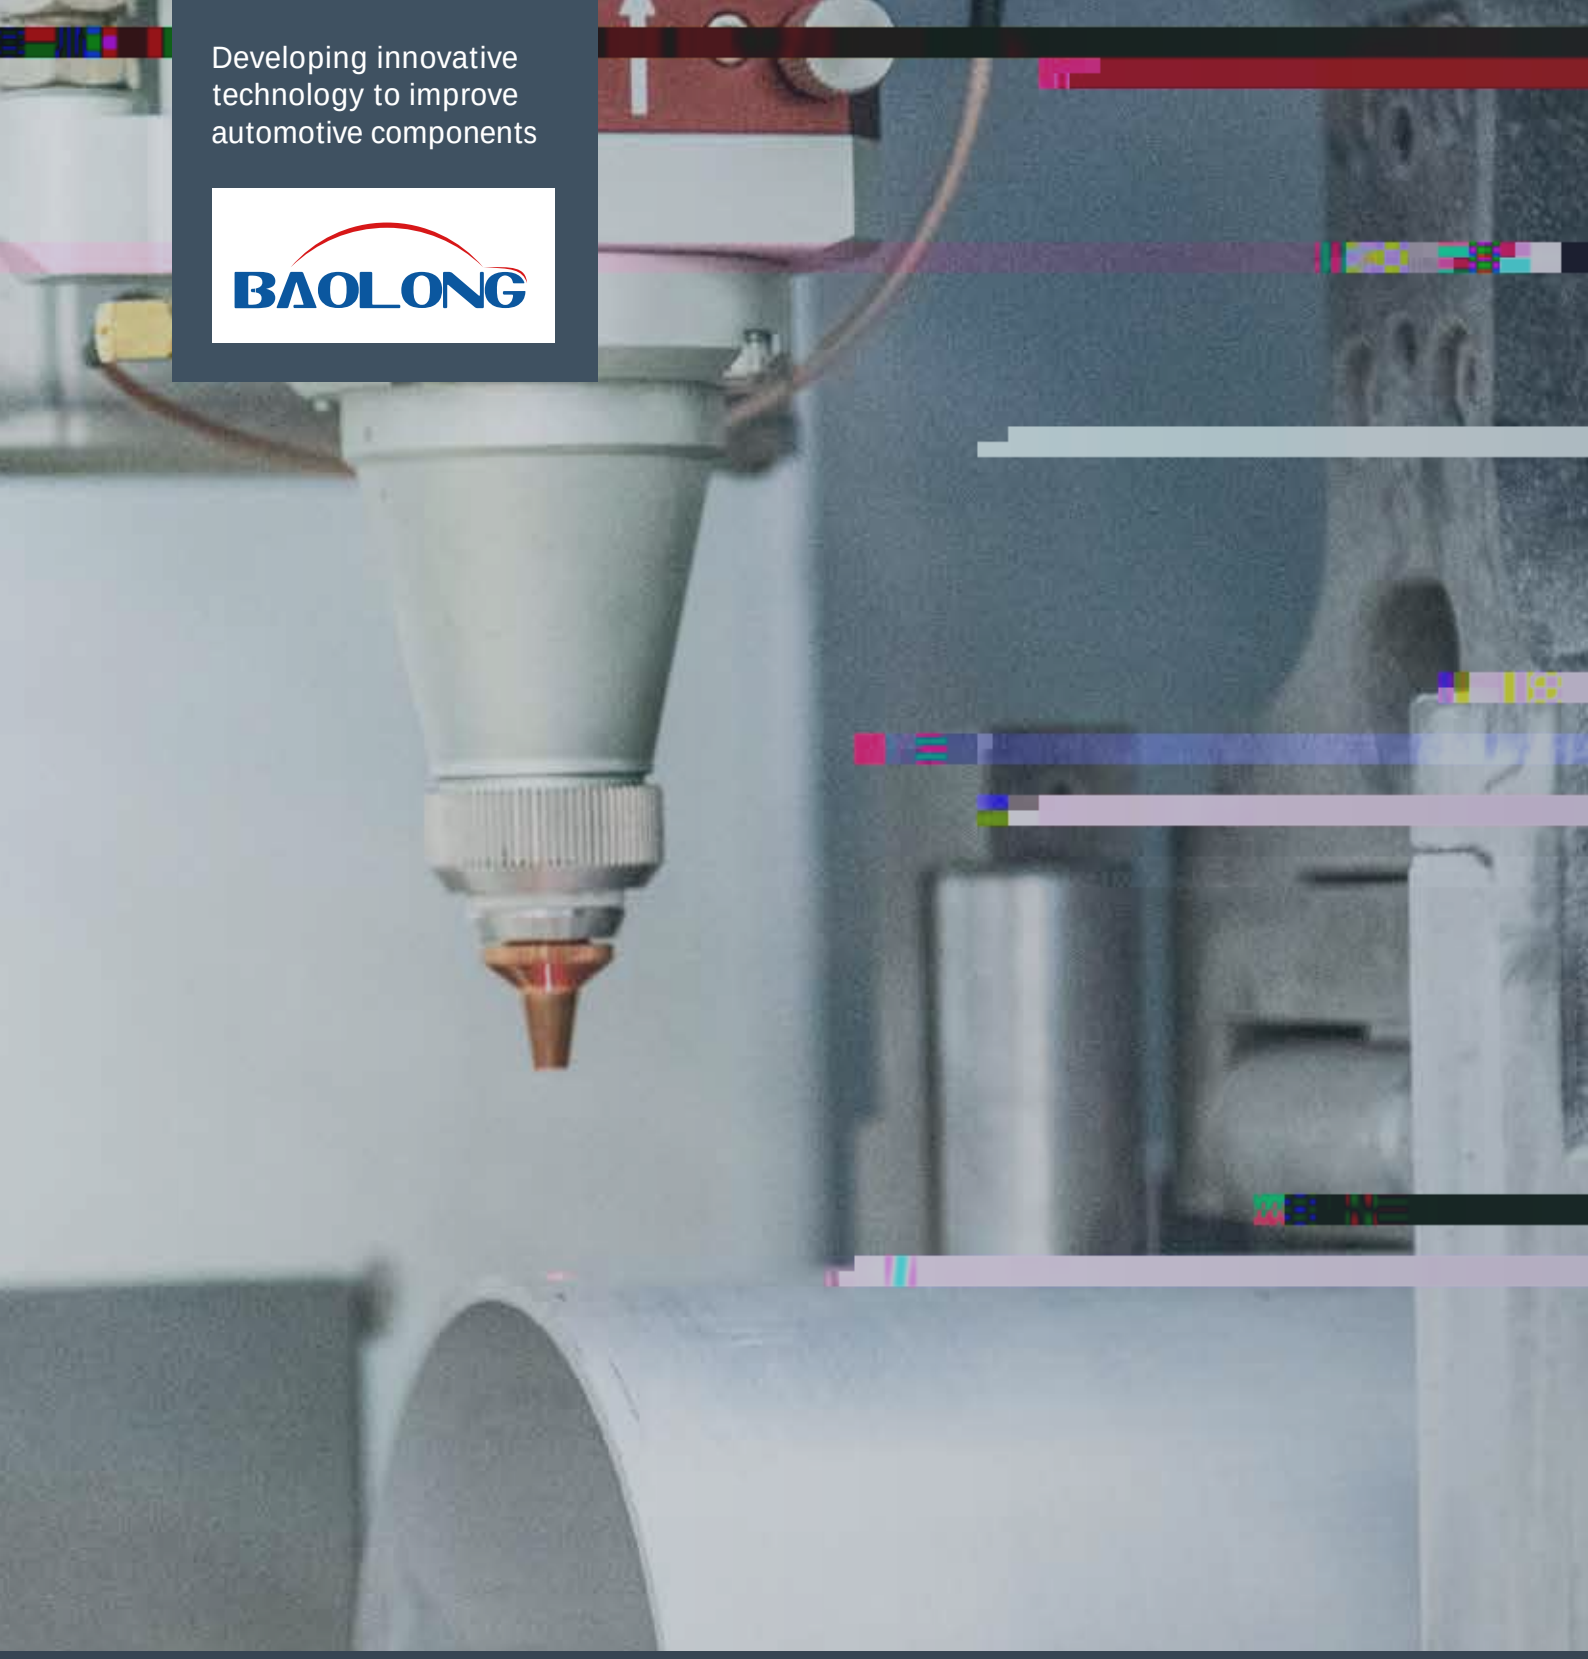

PRODUCT CATALOGUE

AIR RESERVOIR & ALUMINUM PARTS

About Baolong Automotive







1997 5 2017 2025

12 23 15

20 8100

TPMS BUSBAR

50 2500

Shanghai Baolong Automotive Corporation was founded in May, 1997 in Songjiang District, Shanghai, and has been listed on Shanghai Stock Exchange since 2017. By the end of 2025, the company has 12 manufacturing campuses, 23 factories, 15 R&D centers, and over 20 sales branches in China (Songjiang District and Pudong District, Shanghai; Ningguo and Hefei, Anhui Province; Wuhan, Hubei Province; Gaoyou, Jiangsu Province), the United States, Germany, Poland, Hungar y, Austria, Thailand, etc., and more than 8,100 staf around the world.

Baolong of ers extensive product por folio including TPMS, automotive sensors, intelligent assisted driving solutions, ECAS, automotive metal tubing, tire valves, wheel weights, BUSBAR, liquid cold plates, aluminum exteriors, and more.

Baolong has become one of the leading global supplier of tire valves, wheel weights, exhaust pipes, TPMS, and ECAS. It is ranked among China Top 100 Automotive Suppliers and Shanghai Top 50 Manufacturing Enterprises. We've proudly supplied to over 2,500 customers in more than 50 countries. Our main customers include major carmakers, tier-1 suppliers, and independent aftermarket distributors in the world.

Chinese Brands



NEV Start-ups

Foreign Brands

Baolong cooperates with many world-renowned OEMs and Tier 1 suppliers that trust us to implement the most innovative and game-changing products and solutions to improve safety, efficiency and comfort.

Tier 1 Suppliers

Aftermarket

In alphabetical order of English name

Baolong takes pride in the many ce r i fcations and honors that recognize our talent, technology and hard work.



ISO 26262
ISO 26262 Baolong Automotive

CNAS L12065 Baolong Automotive



ISO 14001
ISO 14001 Ningguo Branch



ISO 45001 Ningguo Branch




IATF 16949
IATF 16949 Baolong Automotive



ISO 14001
ISO 14001 Anhui Plant



882d 0375D6

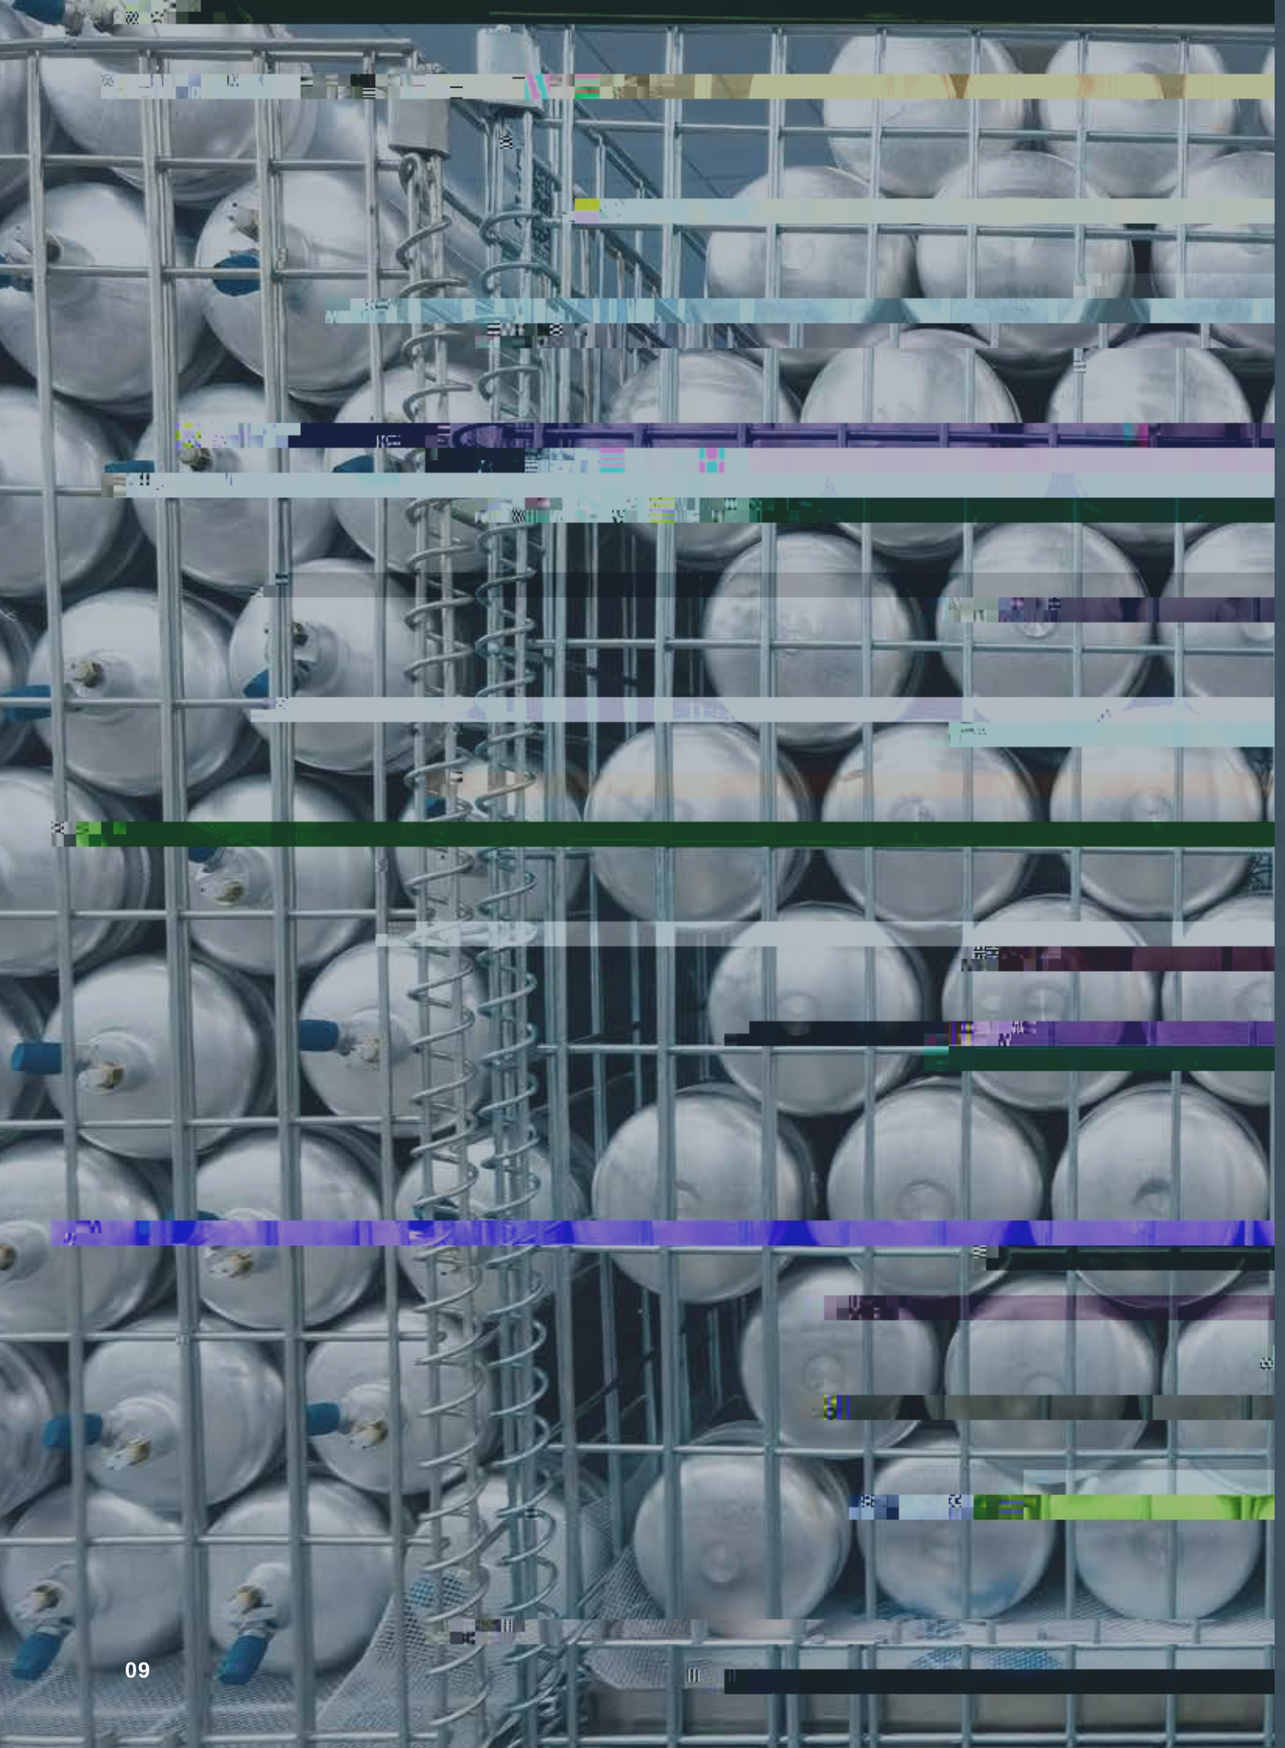

CONTENTS

11-14 AIR RESERVOIRS

15-20 ALUMINUM PARTS

15 PISTON

16 TOP CAP AIR CHAMBER ALUMINUM FRAME

17 GUIDING TUBE

18 LIQUID STORAGE TANK

19 CONNECTORS & BRACKETS

/ Type: AT



/ Parameter	
Installation Style	Hoop
Size	φ118.2×φ118.2×840mm
Volume	8L
Weight	1.92kg
Working Pressure	0-20bar

/ Type: AT



/ Parameter	
Installation Style	Bracket
Size	φ140×φ140×770mm
Volume	10L
Weight	2.6kg
Working Pressure	0-20bar

/ Type: AT



/ Parameter	
Installation Style	Bracket
Size	φ198×φ198×405mm
Volume	10L
Weight	1.8kg
Working Pressure	0-18bar

/ Type: AT



/ Parameter	
Installation Style	Bracket
Size	φ170×φ170×660mm
Volume	13L
Weight	3.55kg
Working Pressure	0-18bar

/ Type: AT006




/ Parameter
Installation Style Bracket
φ123×φ123×1140mm
Size φ123×φ123×1140mm
12L
Volume 12L
2.5kg
Weight 2.5kg
0-18bar
Working Pressure 0-18bar

/ Type: AT030




/ Parameter
Installation Style Bracket
162×114.8×950mm
Size 162×114.8×950mm
6L
Volume 6L
5.3kg
Weight 5.3kg
0-20bar
Working Pressure 0-20bar

/ Type: AT009

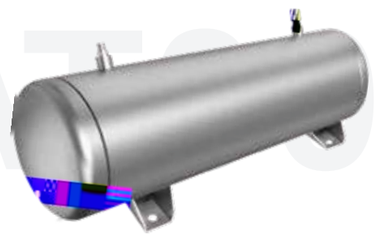

/ Parameter
Installation Style Bracket
φ150×φ150×588mm
Size φ150×φ150×588mm
9L
Volume 9L
2.5kg
Weight 2.5kg
0-20bar
Working Pressure 0-20bar

/ Type: AT013

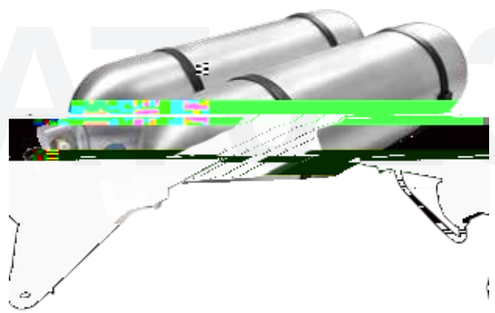

/ Parameter
Installation Style Plastic Tray
260×123×463mm
Size 260×123×463mm
8L
Volume 8L
2.5kg
Weight 2.5kg
0-18bar
Working Pressure 0-18bar

PISTON

/ TypĻ DS

/ Parameter

φ90×φ90×227.6mm

Size φ90Xφ90X227.6mm

6082

Material 6082



/ TypĻ DS

/ Parameter

φ92×φ92×192mm

Size φ92×φ92×192mm

6082

Material 6082

/ TypĻ DS

/ Parameter

φ93.1×φ93.1×193mm

Size φ93.1×φ93.1×193mm

6082

Material 6082



TOP CAP

/ TypĻ DS

/ Parameter

φ135×φ135×17mm

Size φ135×φ135×17mm

6061

Material 6061



AIR CHAMBER

/ TypĻ DS



/ Parameter

φ135×φ135×58mm

Size φ135×φ135×58mm

6061

Material 6061

ALUMINUM FRAME

/ TypĻ DS

/ Parameter

φ141×φ141×52.4mm

Size φ141Xφ141X52.4mm

6063

Material 6063



/ TypĻ DS

/ Parameter

	φ154×φ154×120mm
Size	φ154×φ154×120mm
	6063
Material	6063

/ TypĻ DS

CONNECTORS & BRACKETS

/ TypĻ AS

Parameter
8×24.6×51.6mm
Size 8×24.6×51.6mm
6061
Material 6061

/ TypĻ AS

/ Parameter
40×24×31.5mm
Size 40×24×31.5mm
6063
Material 6063



/ TypĻ AS



/ Parameter
22×28×51.6mm
Size 22×28×51.6mm
3003
Material 3003

/ TypĻ SH



/ Parameter
φ26×φ26×32.5mm
Size φ26×φ26×32.5mm
6061
Material 6061

/ TypĻ AS

/ Parameter
50.8×60.9×71.5mm
Size 50.8×60.9×71.5mm
6061
Material 6061



/ TypĻ AS

/ Parameter
26×35×88.5mm
Size 26×35×88.5mm
6005
Material 6005





ShĔnghĔi BĔolong AutomotivĻ CorporĔtion